

# ASPIFLOC®



Central treatment of sludge from paintings on cab curtain of water or leaching pits.




*L'innovation au service de l'environnement*

SPCB - ZI KERME LIN Nord, 28 rue Lavoisier, 56890 Saint Avé (France)

Tél : + 33 (0) 297 60 82 82 - Fax : + 33 (0) 297 60 85 69 - [contact@aspifloc.com](mailto:contact@aspifloc.com) - [www.aspifloc.com](http://www.aspifloc.com)

# ASPIFLOC®

Central treatment of sludge from paintings on cab curtain of water or leaching pits.

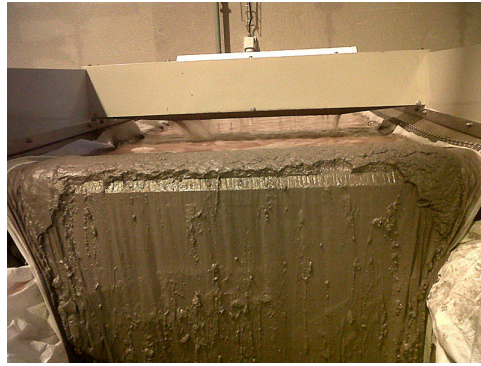

## ADVANTAGES

- Capacity of filtration bag filter - 1000 kg
- Maximum pumping depth of 4m
- Large double diaphragm pump means the unit only requires one pump for all operations.

## SPECIFICATIONS

- Size:
  - Length : 605 mm
  - Width : 1180 mm
  - Height : 2160 mm
- Weight : 260 kg
- Tank : 190 liters
- Maximum flow rate: 500 liters per hour
- Capacity of the bag filter: 1000 kgs
- Depth of pumping: 4 meters
- Capacity of retention: 190 liters

## OPTIONS

- System for cabin.
- EPUR-OIL or EPUR-WATER can be included within the system depending upon requirements



*L'innovation au service de l'environnement*

SPCB - ZI KERMELIN Nord, 28 rue Lavoisier, 56890 Saint Avé (France)  
Tél : + 33 (0) 297 60 82 82 - Fax : + 33 (0) 297 60 85 69  
contact@aspifloc.com - www.aspifloc.com